

VICTORY




SPECIFICATIONS

Construction	LOOP
Product	VICTORY
Pile Fiber Composition	100% Olefin
Yarn Type	BCF
Dye Method	Solution Dyed
Pile Weight	750 g/m ²
Number of Tufts	229100/m ²
Tufting Gauge	1/10"
Primary Backing	Non-Woven
Backing Structures	Recova-PU Cushion EcoShield, 100% Recycled Vinyl StableShield-100% Vinyl
Tile Size	50 cm x 50 cm (19.6 in x 19.6 in)
Pile Height	2.5 mm / 5.5 mm
Total Tile Height	8.0 mm
Pile Treatment	INVISTA Anti-Soil Treatment Anti-Microbial
Recommended Installation	Quarter Turn or Brick

Performance Specifications

VOC (Green Label Plus)	ASTM D5116-06	<0.5 mg/m ² /hour
Flammability (Pill Test)	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Reaction to Fire	EN ISO 9239-1:2002	Dfl - s1
Static Propensity	ISO 6356	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Thermal Resistance	ISO 8302	.04m ² K/W
Impact Sound Insulation	ISO 140-8	ΔL _w 23dB
Sound Absorption Value	EN ISO 11654	α _w : 0.15(H)
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	DIN 54324	R ≥ 2.4

The above Information is subject to modification for the benefit of further improvement.

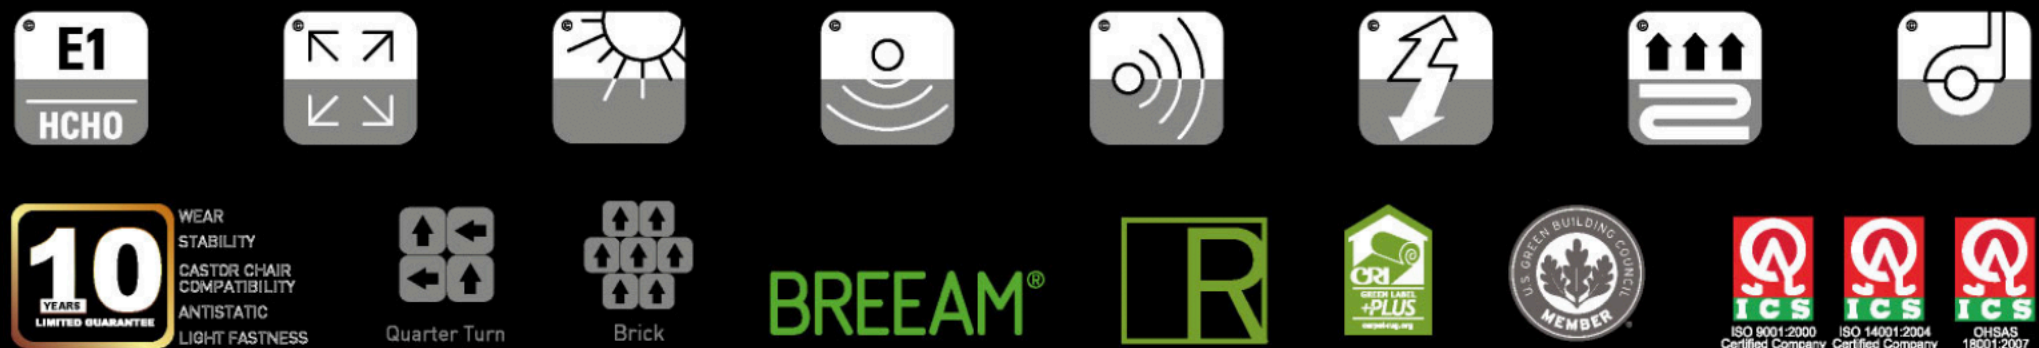

241 Bradwick Drive Concord, ON L4K 1K5
 Phone: 905 738 5470
 Fax: 905 669 0863
 Toll Free: 1800 708 9602
 www.trafficfixvinyl.ca | info@trafficfixvinyl.ca